

## General information

PVS5420200812

The DAT 100/RS485 product is a weight transmitter which guarantees high performance and long-term reliability. Its small width makes it possible to position a large number of transmitters inside the electrical automation panels. DAT 100/RS485 weight transmitter has an interface with intrinsically safe barriers for use in hazardous areas. It has two red status LEDs, 3 mechanical buttons behind the red door and screw terminal blocks.


 Technical Manual: [dat-100\\_en.pdf](#)



All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PVS5420200812

<b>Measuring range:</b>	-4 ÷ +4 mV/V
<b>Input sensitivity:</b>	0.02 µV/count
<b>Full scale non-Linearity:</b>	< 0.01%
<b>Gain drift:</b>	< 0.001% FS/°C
<b>Display:</b>	5 digit, red LED (7 segments), h 7 mm
<b>A/D Converter:</b>	24 bit
<b>Internal Resolution:</b>	> 16.000.000 points
<b>Transducer input voltage:</b>	4 V (max 4 cells 350 Ohm)
<b>Frequency signal acquisition:</b>	4 ÷ 123 Hz
<b>Visible resolution (in divisions):</b>	999999
<b>Divisions value (adjustable):</b>	0.001 ÷ 50
<b>Temperature range:</b>	-10 ÷ +50°C (max umidity 85% without condensation)
<b>Storage temperature:</b>	-20 ÷ +60°C
<b>Filter:</b>	0.2 ÷ 25 Hz
<b>Serial port:</b>	RS232C half duplex with ASCII or Modbus RTU protocol, RS485 full duplex with ASCII or Modbus RTU protocol
<b>Power supply:</b>	24 V c.c. ±10% – power 2 W
<b>Regulatory compliance:</b>	EN61000-6-2, EN61000-6-3 for EMC; EN61010-1 for electrical security
<b>Baud rate:</b>	2400 ÷ 115200 adjustable
<b>Transmission distance:</b>	15 m (RS232); 1000 m (RS485)

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

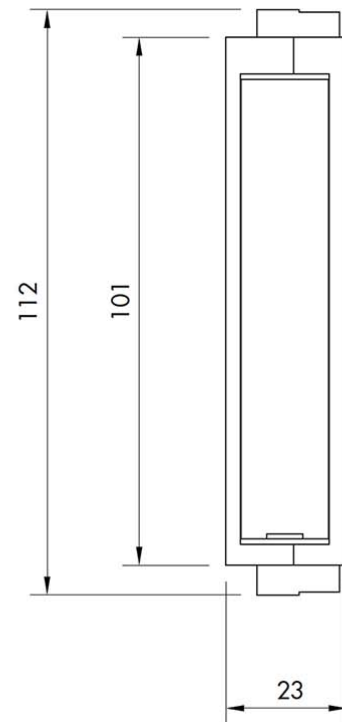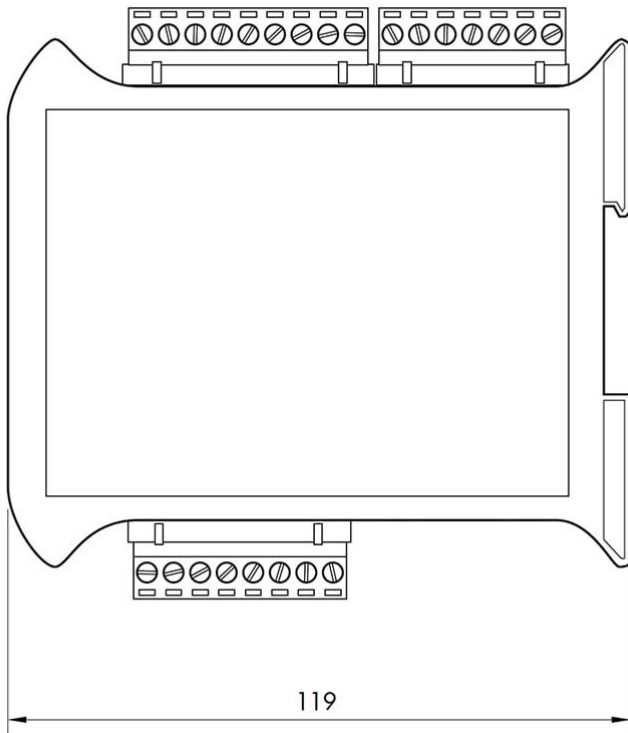

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).