

## General information

PVS6620200812

The product MC 302 is a weight indicator that satisfies various needs in the weighing field, from the management of thresholds to dosage. It has an optional fiscal memory of up to 160,000 weighs and is able to store 50 different recipes that can be printed automatically. The MC 302 weight transmitter has the function of uploading and downloading for programming via TESTER 1008. The product can be customized to customer requirements.






All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PVS6620200812

<b>Measuring range:</b>	-3.9 ÷ +3.9 mV/V
<b>Input sensitivity:</b>	0.02 µV/count
<b>Full scale non-Linearity:</b>	< 0.01%
<b>Gain drift:</b>	< 0.0003% FS/°C
<b>A/D Converter:</b>	24 bit
<b>Internal Resolution:</b>	> 16.000.000 points
<b>Transducer input voltage:</b>	5 V (max 8 load cells- 350 Ohm)
<b>Visible resolution (in divisions):</b>	600000
<b>Divisions value (adjustable):</b>	x1, x2, x5
<b>Decimal figures range:</b>	0 ÷ 4
<b>Temperature range:</b>	-10 ÷ +50 °C
<b>Storage temperature:</b>	-20 ÷ +70°C
<b>Filter:</b>	0.2 ÷ 50 Hz. 100 Hz during dosage
<b>Logic output:</b>	6 outputs (NA) max 115 Vac /30 Vdc 0.5 A cad.
<b>Logic input:</b>	8 optoisolated 12 / 24 Vdc PNP
<b>Serial port:</b>	COM1: RS232 half duplex COM2: RS422/RS485 half duplex
<b>Power supply:</b>	12 ÷ 24 Vdc -10% +15%; 15 VA
<b>Regulatory compliance:</b>	EN45501 for Metrological Norms EN50081-1 and EN50082-2 EMC EN61010-1 for Electrical Safety
<b>Fieldbus:</b>	ASCII, Modbus RTU, Profibus DP, Devicenet and Ethernet TCP-IP external mounting on DIN guide
<b>Baud rate:</b>	1200 ÷ 115200 adjustable
<b>Transmission distance:</b>	15m (RS232C), 1000m (RS422; RS485)
<b>Power consumption:</b>	230 Vac ±10% - 50/60 Hz absorbed power 7 VA (115 Vac on demand)
<b>Weighing optional memory:</b>	> 160.000 weighed

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

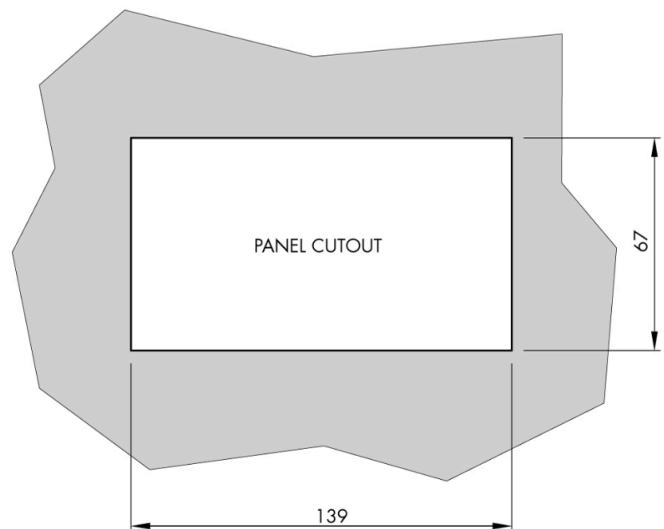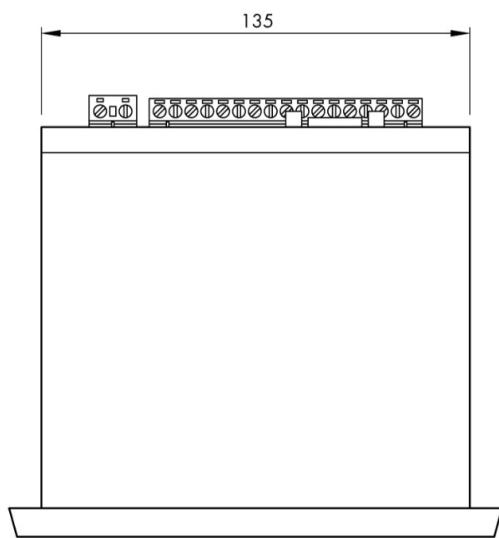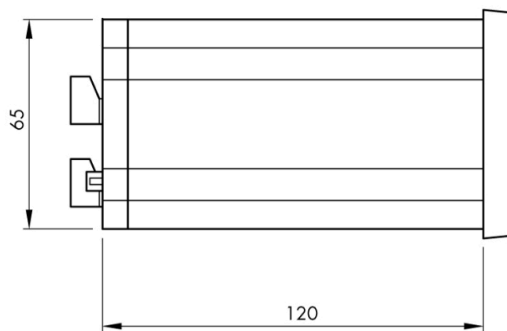

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).