

## General information

PVS22620200812

The weight transmitter DAT 500 Profibus guarantees high performance and reliability. It has the upload and download function for the programming with TESTER 1008. The weight transmitter DAT 500 Profibus can be connected through the external converter and the configuration and calibration can be set up from the front panel or from the PC with the Innovation™ program (MS WINDOWS). The weight transmitter DAT 500 Profibus has a Peak Hold function for dynamic weighings and screw terminal blocks.



Software Innovation 2: [innovation\\_2\\_weighing\\_software.zip](#)

Profibus GSD file: [dat\\_400\\_500\\_profibus\\_gsd.zip](#)

Technical Manual: [dat-500\\_en.pdf](#)

Technical Manual: [dat-500\\_fieldbus\\_en.pdf](#)






All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PVS22620200812

<b>Measuring range:</b>	-0.5 ÷ +3.5 mV/V (-3.9÷+3.9 mV/V optional)
<b>Input sensitivity:</b>	0.02 µV/count
<b>Full scale non-Linearity:</b>	<0.01%
<b>Gain drift:</b>	<0.001% FS/°C
<b>Display:</b>	6 digit, red LED (7 segments), h 14 mm
<b>A/D Converter:</b>	24 bit
<b>Internal Resolution:</b>	> 16.000.000 points
<b>Trasducer input voltage:</b>	5 V (max 6 load cells 350 Ohm)
<b>Visible resolution (in divisions):</b>	60000
<b>Divisions value (adjustable):</b>	x1, x2, x5
<b>Decimal figures range:</b>	0 ÷ 3
<b>Temperature range:</b>	-10 ÷ +50°C (max umidity 85% without condensation)
<b>Storage temperature:</b>	-20 ÷ +70 °C
<b>Filter:</b>	0.1 ÷ 25 Hz
<b>Logic output:</b>	2 Solid-state relays, (maximum load 24 Vdc / 100 mA each)
<b>Logic input:</b>	2 optoisolated 24 Vcc PNP (External voltage)
<b>Serial port:</b>	RS232C with ASCII or Modbus RTU protocols
<b>Power supply:</b>	24 V c.c. ±15% - power 5 W
<b>Regulatory compliance:</b>	EN61326-1, EN55011, EN55014 for EMC; EN61010-1 for electrical security
<b>Fieldbus:</b>	Profibus
<b>Dimensions and weight:</b>	96 x 48 x 120 mm (L x H x D); 250 g
<b>Baud rate:</b>	2400, 9600, 19200, 38400, 115200 adjustable
<b>Transmission distance:</b>	15m (RS232C)

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).

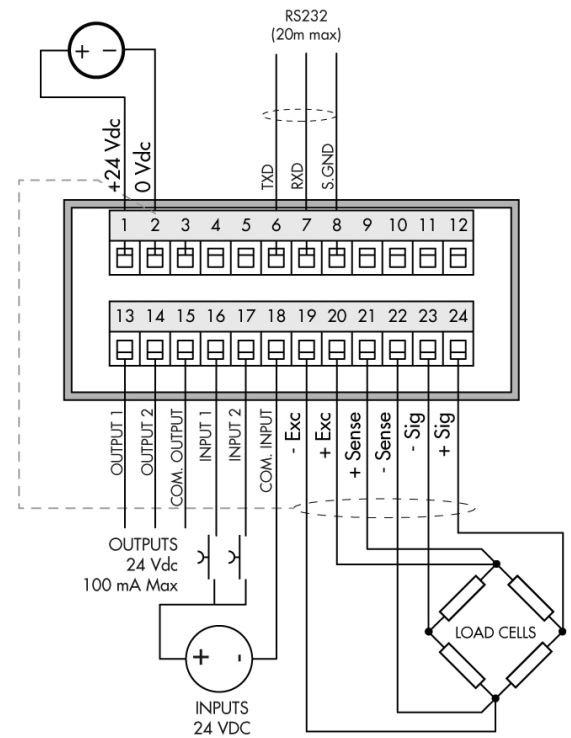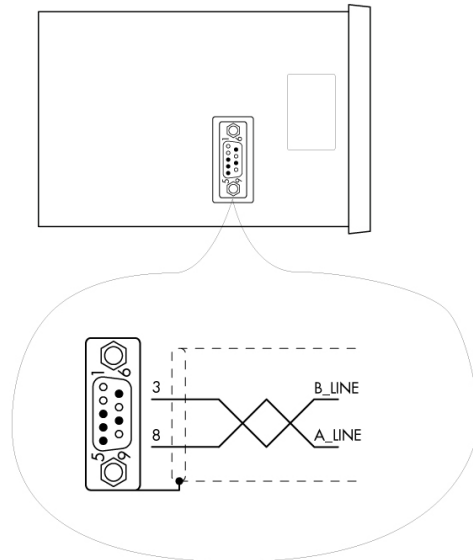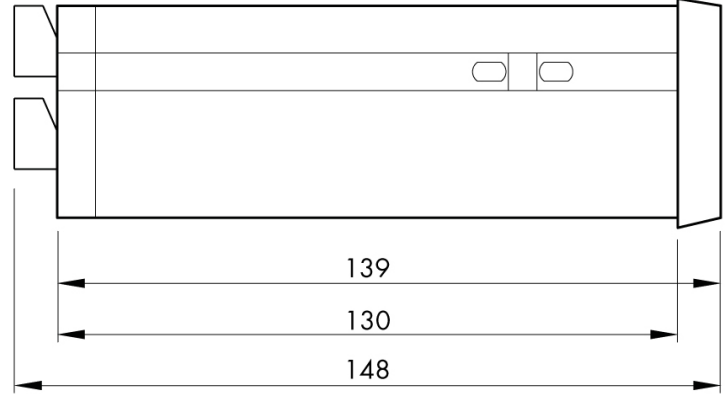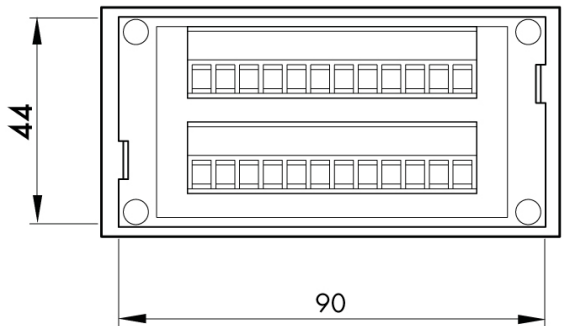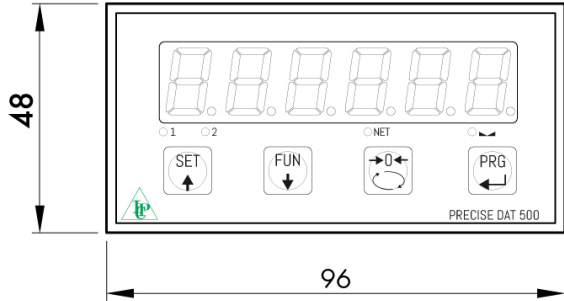

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).